Express Mail Label No. EM580750959US

NEW UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. 11232
Total Pages in this Submission

03/31/98 U.S. Pto

TO THE ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

DIGITAL AUDIO/VIDEO CLOCK RECOVERY ALGORITHM

and invented by:

Richard E. Anderson

If a CONTINUATION APPLICATION, *check appropriate box and supply the requisite information:*

☐ **Continuation** ☐ **Divisional** ☐ **Continuation-in-part (CIP)** of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 35 pages and including the following:
   a. ☒ Descriptive Title of the Invention
   b. ☐ Cross References to Related Applications *(if applicable)*
   c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
   d. ☐ Reference to Microfiche Appendix *(if applicable)*
   e. ☒ Background of the Invention
   f. ☒ Brief Summary of the Invention
   g. ☒ Brief Description of the Drawings *(if drawings filed)*
   h. ☒ Detailed Description
   i. ☒ Claim(s) as Classified Below
   j. ☒ Abstract of the Disclosure
3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
   a. ☐ Formal
   b. ☒ Informal

   Number of Sheets 10

NEW UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. 11232
Total Pages in this Submission

Application Elements (Continued)

4. ☐ Oath or Declaration
   a. ☐ Newly executed *(original or copy)* ☐ Unexecuted
   b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
   c. ☐ With Power of Attorney ☐ Without Power of Attorney

5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
   The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche *(Appendix)*

7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
   a. ☐ Paper Copy
   b. ☐ Computer Readable Copy *(identical to computer copy)*
   c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*

9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*

10. ☐ English Translation Document *(if applicable)*

11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Acknowledgment postcard

14. ☒ Certificate of Mailing

    ☐ First Class ☒ Express Mail *(Specify Label No.):* EM580750959US

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

NEW UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
11232

Total Pages in this Submission

Accompanying Application Parts (Continued)

16. ☐ Additional Enclosures *(please identify below):*

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra		Rate	Fee
Total Claims	12	- 20 =	0	x	$22.00	$0.00
Indep. Claims	3	- 3 =	0	x	$82.00	$0.00
Multiple Dependent Claims (check if applicable) ☐						$0.00
					BASIC FEE	$790.00
OTHER FEE *(specify purpose)*						$0.00
					TOTAL FILING FEE	$790.00

☐ A check in the amount of to cover the filing fee is enclosed.

☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **09-0457** as described below. A duplicate copy of this sheet is enclosed.

- ☒ Charge the amount of **$790.00** as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **March 31, 1998**

Signature

Paul J. Esatto, Jr.
Registration No.: 30,749

Scully, Scott, Murphy & Presser
400 Garden City Plaza
Garden City, New York 11530
(516) 742-4343

cc:

DIGITAL AUDIO/VIDEO CLOCK RECOVERY ALGORITHM

Field of the Invention

This invention relates to digital delivery systems, especially for digital video and digital audio data. More particularly, the invention relates to multiplexors networks, distribution systems, demultiplexors, and multiplexed bitstreams, and especially to bitstreams carrying a system or transport layer, and one or more data layers of compressed digital video and digital audio data. More particularly, the invention relates to recovering the system clock with minimum demand on a processor.

BACKGROUND OF THE INVENTION

Within the past decade, the advent of world-wide electronic communications systems has enhanced the way in which people can send and receive information. Moreover, the capabilities of real-time video and audio systems require a large bandwidth. In order to provide services such as video-on-demand and video conferencing to subscribers, an enormous amount of network bandwidth is required. In fact, network bandwidth is often the main inhibitor to the effectiveness of such systems.

In order to minimize the effects of the constraints imposed by the limited bandwidths of telecommunications networks, compression systems and

standards have evolved. These standards prescribe the compression of video and audio data and the delivery of several programs and control data in a single bit stream transmitted in a bandwidth that would heretofore only accommodate one analog program.

One video and audio compression standard is the Moving Picture Experts Group ("MPEG") standard. Within the <PEG-2 standard, video compression is defined both within a given picture, i.e., spatial compression, and between pictures, i.e., temporal compression. Video compression within a picture is accomplished by conversion of the digital image from the time domain to the frequency domain by a discrete cosine transform, quantization, variable length coding, and Huffman coding. Video compression between pictures is accomplished via a process referred to as motion compensation, in which a motion vector is used to described the translation of a set of picture elements (pels) from one picture to another, Audio compression is as defined in the standard.

The procedure for transporting the compressed bitstream from the transmitting end to the receiving end of the system, and for thereafter decompressing the bitstream at the receiving end, so that one of the many picture sequences is decompressed and may be displayed in real-time is specified in ISO 13818-1. ISO 13818-1 is the systems or transport layer portion

of the MPEG-2 standard. This portion of the standard specifies packetization of audio and video elementary bitstreams into packetized elementary stream (PES), and the combination of one or more audio and video packetized elementary stream into a single time division or packet multiplexed bitstream for transmission and the subsequent demultiplexing of the single bitstream into multiple bitstreams for decompression and display. The single time division or packet multiplexed bit stream is as shown from various architectural and logical perspectives in the FIGURES, especially FIGURES 1 to 5, where many packets make up a single bitstream.

The concept of packetization and the mechanism of packet multiplexing are shown in FIGURE 1, denominated "Prior Art", where elementary streams are formed in an audio encoder, a video encoder, a source of other data, and a source of systems data. These elementary streams are packetized into packetized elementary streams, as described hereinbelow. The packetized elementary streams of audio data, and video data, and the packets of other data and systems data are packet multiplexed by the multiplexor into a system stream.

The time division or packet multiplexed bitstream is shown, for example, in FIGURES 2 and 5, both denominated "Prior Art", which gives an overview showing the time division or packet multiplexed

bitstream. The bitstream is comprised of packets, as shown in FIGURE 5. Each packet, as shown in FIGURE 2, is, in turn, made up of a packet header, an optional adaptation field, and packet data bytes, i.e., payload.

The MPEG-2 System Layer has the basic task of facilitating and multiplexing of one or more programs made up of related audio and video bitstreams of one or more programs made up of related audio and video bitstreams into a single bitstream for transmission through a transmission medium, and thereafter to facilitate the demultiplexing of the single bitstream into separate audio and video program bitstream for decompression while maintaining synchronization. By a "Program" is meant a set of audio and video bitstreams having a common time base and intended to be presented simultaneously. To accomplish this, the System Layer defines the data stream syntax that provides for timing control and the synchronization and interleaving of the video and audio bitstream. The system layer provides capability for (1) video and audio synchronization, (2) stream multiplex, (3) packet and stream identification, (4) error detection, (5) buffer management, (6) random access and program insertion, (7) provide data, (8) conditional access, and (9) interoperability with other networks, such as those using asynchronous transfer mode (ATM).

An MPEG-2 bitstream is made up of a system layer and compression layers. Under the MPEG-2 Standard (ISO/IEC 13818-1) a time division of packet multiplexed bit-stream consists of two layers, (1) a compression layer, also referred to as an inner layer, a payload layer, or a data layer, and (2) a system layer, also referred to as an outer layer or a control layer. The compression layer or inner layer contains the data fed to the video and audio decoders, and defines the coded video and audio data stream, while the system layer or outer layer provides the controls for demultiplexing the interleaved compression layers, and in doing so defines the functions necessary for combining the compressed data streams. This is shown in FIGURE 3, denominated "Prior Art". As there shown a bitstream of, for example, a system layer ans compression layer, is the input to a system decoder. In the system decoder the system layer data is demultiplexed into the compressed audio layer, the compressed video layer, and control data. The control data is shown in FIGURE 3, denominated Prior Art, as the PCR (Program Clock Recover) data, enable data, and start up values. The compressed data is sent to the respective audio and video data buffers, and through decoder control to the respective audio and video decoders.

The system layer supports a plurality of basic functions, (1) time division or packet multiplexing

and demultiplexing of the time division or packet multiplexed multiple bit-streams, (2) synchronous display of the multiple coded bit stream, (3) buffer management and control, and (4) time recovery and identification. The system layer also supports (5) random access, (6) program insertion, (7) conditional access, and (8) error tracking.

For MPEG-2, the standard specified two types of layer coding, a program stream (PS), for relatively lossless environments, such as CD-ROMs, DVDs, and other storage media, and transport stream (TS), for loss media, as cable television, satellite television, and the like. The transport stream (TS), shown in FIGURE 2, denominated Prior Art, consists of a stream of transport stream packets, each of which consists of 188 bytes, divided into 4 bytes of packet header, an optional adaptation field, and up to 184 bytes of the associated packet data, that is, payload. The relationship of the layering of the access units, the PES packets, and the Transport Stream (TS) packets is shown in FIGURE 5, denominated Prior Art.

The transport stream (TS) is used to combine programs made up of PES-coded data with one or more independent time bases into a single stream. Note that under the MPEG-2 standard an individual program may not have a unique time base, but that if it does, the time base

is the same for all of the elements of the individual program.

The packetized elementary stream (PES) layer is an inner layer portion of the MPEG-2 time division or packet multiplexed stream upon which the transport of program streams are logically constructed. It provides stream specific operations, and supports the following functions: (1) a common base of conversion between program ad transport streams, (2) time stamps for video and audio synchronization and associated timing, especially for associated audio and video packets making up a television channel, presentation or program, and having a common time base, (3) stream identification for stream multiplexing and demultiplexing, and (4) such services as scrambling, VCR functions, and provide data.

As shown in FIGURE 5, denominated Prior Art, video and audio elementary streams (ES) must be PES-packetized before inserting into a transport stream(TS). Elementary streams (ES) are continuous. PES packets containing an elementary stream (ES) are generally of fixed lengths. Typically, video PES packets are in the order of tens of thousands of bytes, and audio PES packets are on the order of thousands of bytes. However, video PES packets can also be specified as of undefined length.

The MPEG-2 packetized elementary stream (PES) packet structure is shown in FIGURE 4. To be noted is that all of the fields after the PES packet length are optional. The PES (packetized elementary stream) packet has bit start code, a packet length field, a 2 bit "10" field, a scramble control field, a priority field, a data alignment field, a copy field, a PTS/DTS (Presentation Time Stamp/Decoding Time Stamp) field, a field for other flags, and a header length field.

The "Optional Header" field includes a Presentation Time Stamp field, a Decoding Time Stamp field, an elementary stream clock reference field, a elementary stream rate field, a trick mode field, a copy info field, a Prior Packetized Elementary Stream Clock Recovery field, an extension and stuffing.

The packet start code provides packet synchronization. The stream ID field provides packet identification. Payload identification is also provided is also provided by the stream ID. The PTS/DTS flag fields and the PTS/DTS fields provide presentation synchronization. Data transfer is provided through the packet/header length, payload, and stuffing fields, The scramble control field facilitates payload descrambling, the extension/private flag fields and the provide data fields provide private information transfer.

A transport stream (TS) may contain one or more independent, individual programs, such as individual television channels or television programs, where each individual program can have its own time base, and each stream making up an individual program has its own PID. Each separate individual program has one or more elementary streams (ES) generally having a common time base. To be noted, is that while not illustrated in the FIGURES, different transport streams can be combined into a single system transport stream. Elementary stream (ES) data, that is, access unit (AU), are first encapsulated into packetized elementary stream (PES) packets, which are, in turn, inserted into transfer stream (TS) packets, as shown in FIGURE 5, denominated Prior Art.

The architecture of the transport stream (TS) packets under the MPEG-2 specifications is such that the following operations are enabled: (1) demultiplexing and retrieving elementary stream (ES) data from one program within the transport stream, (2) remultiplexing the transport stream with one or more programs into a transport stream (TS) with a single program, (3) extracting transport stream (TS) packets from different transport streams to produce another transport stream (TS) packet into one program and converting it into a program stream (PS) containing the same program, and (5) converting a program stream (PS) into a transport stream (TS) to carry it over a

lossy medium to thereafter recover a valid program stream (PS).

At the transport layer, the transport sync byte provides packet synchronization. The Packet Identification (PID) field data provides packet identification, demultiplexing, and sequence integrity data. The PID field is used to collect the packets of a stream and reconstruct the stream. The continuity counters and error indicators provide packet sequence integrity and error detection. The Payload Unit start indicator and Adaption Control are used for payload synchronization, whole the Discontinuity Indicator and Program Clock Reference (PCR) fields are used for playback synchronization. The transport scramble control field facilitates payload descrambling. Provide data transfer is accomplished through the Private Data Flag and Private Data Bytes. The Data Bytes are used for private payload data transfer, and the Stuffing Bytes are used to round out a packet.

Achieving and maintaining clock recovery and synchronization is a problem, especially with audio and video bitstreams. The MPEG-2 model assumes an end-to-end constant delay timing model in which all digital image and audio data take exactly the same amount if time to pass through the system from encoder to decoder. The system layer contains timing information that requires constant delay. The clock

references are Program Clock Reference (PCR) and the time stamps are the Presentation Time Stamp/Decoding Time Stamp (PTS/DTS).

The decoder employs a local system clock having approximately the same 27 Megahertz frequency as the encoder. However, the decoder clock can not be allowed to free run. This is because it is highly unlikely that frequency of the decoder clock would be exactly the same as the frequency of the encoder clock.

Synchronization if the two clocks is accomplished by the Program Clock Reference (PCR) data field in the packet adaptation field of the PCR PID for the program. The Program Clock Reference values can be used to correct the decoder clock. Program Clock Reference, or PCR, is a 42 bit field. It is coded in two parts, a PCR Base having a 33-bit value in units of 90 kHz, and a PCR extension having a 9-bit extension in units of 27MHz, where 27 MHz id the system clock frequency.

As a general rule, the first 42 bits of the first PCR received by the decoder initialize the counter in a clock generation, and subsequent PCR values are compared to clock values for fine adjustment. The difference between the PCR and the local clock can be used to drive a voltage controlled oscillator, or a

similar device or function, for example, to speed up or slow down the local clock.

Audio and video synchronization is typically accomplishes through the Presentation Time Stamp (PTS) inserted in the Packet Elementary Stream (PES) header. The Presentation Time Stamp is a 33-bit value in units of 90 kHz, where 90 kHz is the 27 MHZ system clock divide by 300. The PTS value indicates the time that the presentation unit should be presented to the user.

The system layer timing information, PCR and PTS/DTS, keep the encoder and decoder in synchronization, with the PCR values correcting the decoder clock. The timing information, PCR and PTS/DTS, arrive at the decoder about every 10-100 milliseconds for the PCR, and at least as frequently as about every 700 milliseconds for the PTS/DTS. Processing and filtering the timing signals consumes significant processor resources. This is because the clock signals are in mixed number bases, the clock signals can arrive at widely varying times, there is no way to sort out necessary interrupts from unnecessary interrupts, and, most important o fall, errors in clock management are directly visible and/or audible through buffer overflow or underflow and color disturbance. However, as noted above, the relationship between PCR and the STC values are used to drive a voltage controlled oscillator or similar

device. The voltage controlled oscillator or similar device speeds up or slows down the local clock driving the STC. In this context, a need exists for functionality in the system to reduce the processing demand on the processor. Specifically, there is a need for (1) reducing the number of clock management interrupts to the processor, and (2) a mechanism to closely match the rates of the encoder and decoder clocks as specified by the PCR and STC values as well as minimizing the difference between the PCR and STC values. The last requirements allows an internal clock recovery mechanism to make small adjustments to the value controlling the local clock frequency without interrupting the processor for a period of time.

OBJECTS OF THE INVENTION

It is a primary object of the invention to provide for clock recovery while reducing the processing demand on a processor.

It is a still further object of the invention to provide additional hardware or software functions that reduce the clock recovery load on the host.

It is a still further object of the invention to match the local clock frequency to the encoder frequency specified by the arriving time stamps very quickly.

It is still a further object of the invention to minimize the difference between the PCR and STC values.

It is a still further object of the invention to keep the clock recovery mechanism, self regulating when in a self-regulating condition, interrupting the host only during a significant clock change.

SUMMARY OF THE INVENTION

According to our invention clock recovery is obtained with minimum processing demand on the host or other processor. This is accomplished by a software mechanism running on a processor which closely matches the local clock frequency to that specified by the arriving time stamps (PCRs). The software mechanism also minimizes the difference between the PCR and STC values. The result of software mechanism is used to adjust the variable controlling the local clock frequency. This allows a hardware clock recovery mechanism, to be used until the difference between the PCR and the STC exceeds a programmable threshold. A further aspect of our invention is that demultiplexors incorporating it quickly adjust the local clock so that both the frequency and absolute values are closely matched.

THE FIGURES

The invention may b understood by reference to the Figures.

FIGURE 1, denominated Prior Art, shows the packet multiplexing of the transport stream.

FIGURE 2, denominated "Prior Art", shown a schematic view of the transport packet stream with a 188 byte packet, a 4 byte header, an optional adaptation field, and payload, the payload being present if the adaptation field is less then 184 bytes.

FIGURE 3, denominated "Prior Art", is a schematic view of the MPEG-2 system structure, showing the system decoder, i.e., a demultiplexor, demultiplexing the incoming bitstream into an audio compression layer for an audio buffer and decoder, a video compression layer for a video buffer and decoder, and PCR data for clock control.

FIGURE 4, denominated "Prior Art", is a schematic view of the PES (packetized elementary stream) structure according to the MPEG-2 Standard, showing the PES header. The FIGURE shows the PES header broken into its separate fields, with a further breakdown of the Extension field within the Optional Header field.

FIGURE 5, denominated Prior Art shows the relationship of the layering of the access units, the PES packets, and the Transport Stream (TS) packets, with the encapsulation of elementary stream data into transport stream packets.

FIGURE 6 shows the dataflow of the transport demultiplexor of the invention.

FIGURE 7 shows one embodiment of the clock recovery logic which can be used by our invention.

FIGURE 8 shows one embodiment of the relationship between the hardware and software clock recovery mechanisms.

FIGURE 9 shoes one embodiment of the software clock recovery mechanism of our invention.

DETAILED DESCRIPTION OF THE INVENTION

The MPEG-2 transport bitstream is a set of tine division or packet multiplexed bitstreams. Each such time division or packet multiplexed bitstream may contain a plurality of programs, that is, television channels, digital communications, or the like. Each bitstream contains a systems stream which provides systems layer functions for one or more audio and video elementary streams in the time division or

packet multiplexed single stream. The single stream is as shown in FIGURES 1 to 5, denominated "Prior Art", where many packets make up the single bitstream. As shown generally in FIGURES 1 to 5, and with specificity in FIGURE 2, the first level of granularity is a transport layer, made up of a 4 byte header, an optional adaptation field, and a payload (the payload is up to 184 bytes if the adaptation field is less than 184 bytes.). In turn, at the next level of granularity, each packet is made up of a packet header, and packet payload data bytes, which may be PES packets, table sections, or private data.

FIGURE 6 represents the dataflow of transport stream data through the transport demultiplexor of the invention. The SYNC block determines the start of the transport packet. The PACKET PARSER extracts data from the transport packet header and adaptation field. The PID is one of these fields. The PID is compared to active PIDs in the PID filter. If the matches one of the predefined values, the remaining fields are extracted and the packet is forwarded to the descrambler interface which will send filtered but scrambled data to a descrambler, if present. The descrambler, if present, descrambles and reconstructs the packets as configured by the application. The resulting stream is optionally forwarded to an auxiliary port which provides means for other devices to obtain access to the data.

EN998-042

Concurrently, the packet parser sends PCRs from matching PCR packets to the clock recovery unit for reconstructing the System Time CLOCK (STC).

Status indicators representing parsed information are sent along with the complete transport packet to the packet loader to be stored in the packet buffer. The packet buffer holds a plurality, for example up tp ten or more, transport packets whole they are moved to the decoders and the DRAM or other memory. The packet buffer efficiently absorbs any latency of these data targets.

The transport core contains three unloaders, an audio unloader, a video unloader, and a data unloader. The audio unloader and the video unloader send data to the respective decoders as the data is requested. The data unloader sends data to a controller for subsequent transfer to system memory. The memory unloader can also be set up to filter table sections and perform crc checking of section data.

According to the invention the transport demultiplexor accepts either parallel or serial data, detects the synchronization character in the datastream, and establishes transport packet boundaries therefrom. In the case of serial input, where only a clock bit is provided, the transport demultiplexor of the invention establishes byte alignment.

The Packet Parser extracts Transport Error Indictor information from each packet, as well as the packet boundary information, and sends it to other units to assist in their processing. Some of the parsed information is stored in the packet buffer along with the packet for use by the unloaders.

If the packet parser selects the Transport Error Indictor is set, or that the sync byte is missing and the sync drop is greater than 0, or that the TS Error Signal is active, the packet is discarded.

Transport packets containing PCRs may arrive with errors such as the Transport Error indictor in the packet header. The PCR fields from errored packets are not used for clock recovery, since the PCR field may be in error.

The value of the Payload Unit Status Indicator bit is forwarded to the unloaders through the packet buffer for use during packet unload to send the packetized elementary streams.

The Packet Parser incorporates a PID filter, such as 32 entry PID filter. The 13 bit PID value is sent to the PID filter to determine if a match occurs. Packets that match a PID filter entry ate forwarded, while all other packets, including null packets, are discarded.

The transport demultiplexor of the invention further provides PID filtering. The PID filter registers and a corresponding PID enable register are used to control which packets are forwarded through the transport demultiplexor. There are up to 32 programmable PID values that are used to filter the transport stream. The PID filter associates a PID index, for example, a 5 bit PID index, with each of the 32 PIS entries. One PID index is reserved for the video PID, and one for the audio PID. The other PID entries are defined by the application.

The front-end PID filtering logic filters incoming transport packets before they are placed in the packet buffer. Data from the PIDs, for example, data from up to about 32 different PIDs can be captured by the transport core or transport demultiplexor of the invention for delivery to the output ports. All other packets, including null packets, may be discarded.

A plurality of registers, for example, thirty two registers, are used to assign a PID index to each of the filtered packets to be delivered downstream, for example, to a descrambler and/or a decoder and/or a Packet Buffer. A PCR PID register holds the PCR PID value which can be the same or different from any of the general PID filter indices. If the PCR PID is not the same as one of the PID filter packets, then the PCR PID packets are not forwarded. Moreover, since

the PCR PID filter is separate from the general PID filters, the STC can be initialized before the transport begins delivering data to the decoders.

When the datastream is scrambled, as would be the case for a scrambled European Telecommunications Standards Institute Digital Video Broadcasting (ETSI DVB) compliant stream, the two bit Transport Scrambling Control bits are extracted and sent to the descrambler, if present.

The two bit Adaptation Field Control Field is used to determine if an adaptation field and/or a payload is present. If an adaptation field is present, the adaptation field parsing described hereinbelow is performed. Packets with an adaptation field control value of "00" are discarded. A value of "01" indicates that there is no adaptation field, only payload. A value of "10" indicates that there is an adaptation field only, and no payload, while a value of "11" indicates that there is an adaptation field followed by payload.

The 4-bit Continuity Counter field is maintained for each enabled PID index to detect any missing data in the payload stream. The Continuity Counter is incremented on each incoming packet with a payload. This 4-bit counter wraps around to 0x0 after it reaches 0xF. The value of the continuity counter

maintained by the hardware is compared to the incoming packets. If the values do not match, a PID stream error is signaled.

However, there are two situations where a PID stream error is not signaled. First, an error is not signaled if the discontinuity indicator in the adaptation field is set. In this case, the break in continuity is expected. Second, if two consecutive packets in the transport stream with the same PID have the same continuity counter value, an error is not signaled. This is because in this case one packet is a duplicate of the other. If there is no error in the first packet, the second packet is discarded. If, however, there is an error in the first packet, it is discarded and the second packet is loaded into the packet buffer.

A continuity count error is handled as a PID stream error and is forwarded to the unloaders by setting the error bit in the packet flags field stored with the packet in the packet buffer. The error can also signal an interrupt to the application processor.

The continuity field count in non-payload packets is not checked as defined by the MPEG standard. This is because the continuity count is used to insure integrity of the payload data.

The syntax of the Adaptation Field is shown in Figure 2. Certain fields in the Adaptation Field are of special interest. For example, the Adaptation Field Length field indicates the number of byte in the adaptation field following this field. If the Adaptation Field Length Field is greater than 00, then the Adaptation Field Flags are defined. The adaptation field length is used by the unloaders to determine the start of the payload, and to deliver the Adaptation Field to the Memory queues as configured by the application processor.

The first field in the Adaptation Fields is the 1-bit Discontinuity Indicator. This flag indicates two different types of discontinuity, continuity counter and system time base. The discontinuity indicator in the PCR PID indicates a discontinuity in the system time base. The PCR, if present, is loaded into the STC. A system time base discontinuity is also signaled to the decoders on the first video or audio packet following the discontinuity. The application or host processor can be interrupted upon the arrival of a discontinuity indicator.

The next field in the Adaptation Fields is the 1-bit random access indicator. The audio and video PIDs can be configured to interrupt the host processor or assist processor upon the arrival of the random access indicator.

EN998-042

The PCR fields are forwarded to the Clock Recovery Unit.

The transport demultiplexor employs a local system clock that needs to be controlled to have the same frequency and phase as the encoder. As noted above, the decoder clock cannot be allowed to free run. This is because it is highly unlikely that frequency of the decoder clock would be exactly the same as the frequency of the encoder clock, and the clocks would quickly get out of synchronization.

Synchronization of the two clocks is accomplished by the Program Clock Reference (PCR) data field in the Transport Stream adaptation field. The Program Clock Reference values correct the decoder clock. Program Clock Reference, or PCR, is a 42 bit field. It is coded in two parts, a PCR Base having a 33-bit value in units of 90 kHz, and a PCR extension having a 9-bit value in units of 90 kHz, and a PCR extension having a 9-bit extension in units of 27 MHz. 27 MHz is the system clock frequency. The value encoded in the PCR field is the byte arrival time, t(i), where i is the byte containing the last bit of the PCR base field,

PCR base (i)= [(System Clock frequency * t(i)) DIV 300]%2

PCR extension (i) = [(System Clock frequency * t(i)) DIV 1]%300

$$PCR(i) = 300 * PCR\ base\ (i) + PCR\ extension\ (i)$$

As a general rule, the first PCR initializes the counter in a clock generation, and subsequent PCR values are compared to clock values for fine adjustment. The different between the PCR and the local clock can be used to drive a voltage controlled oscillator, for example, to speed up or slow down the local clock.

As noted above, clock recovery and synchronization are required, especially with audio and video bitstreams. The system layer contains timing information to insure constant delay. The time stamps to accomplish synchronization this are the PCR (Program clock reference) and the PTS/DTS (Presentation Time Stamp/Decoding Time Stamp).

A function of the transport demultiplexor is recovering the program clock from the transport stream. The transport demultiplexor of the invention extracts Program Clock References (PCRs) from the indicated PID, calculates the offset from the current System Time Clock (STC) value, and compares it against a threshold defined by the application to determine if clock frequency correction is required.

The clock difference can either be directly filtered, using a simple hardware algorithm, or the clock

difference can provide an interrupt to allow a software algorithm to control the local clock frequency. The output of the hardware algorithm and/or the software algorithm is loaded into a register controlling the modulation of a serial pulse train which in turn is used to regulate a Voltage Controlled Oscillator, for example, an external Voltage Controlled Crystal Oscillator (VCXO) or similar device. The PWM filter register and PWM generator are shown in Figure 7.

The clock recovery logic shown in Figure 7 provides frequency matching for the program. The clock recovery loop includes a Program Clock Recovery (PCR) register, a PCR-STC (Program Clock Recovery - System Time Clock) register, Delta Threshold register, a Latched STC (System Time Clock) register, a PWM (Pulse Width Modulator) register, PWM generator, and an STC (System Time Clock) counter.

The clock recovery loop can be enhanced to include a software clock recovery algorithm as shown in Figure 8. The software algorithm is activated when the value in the PCR-STC Delta register exceeds the value stored in the PCR-STC Delta Threshold Register.

One preferred embodiment of the software algorithm is shown in Figure 9. The algorithm is activated by an interrupt from hardware to indicate that a pre-

determined threshold stored in the PCR-STC Delta Threshold Register has been exceeded or because the local time clock was loaded due to a program change or time base discontinuity (not shown). After the new PCR and STC values are checked for validity, two algorithms are used to calculate the amount to adjust the local clock frequency.

One algorithm uses the PCR and STC values stored from when the last time the software algorithm was executed. Using both the stored previous values and the new values the exact difference in frequency between that specified by the arriving PCRs and the local clock can be determined. The result can be adjusted by multiplying by a constant to control how fast the local clock frequency can be adjusted.

The other algorithm uses the current PCR and STC values to determine a difference. The difference adjusted by a multiplying by a constant is also used to adjust the local clock.

The adjustments from both algorithms are summed. The summed result is compared to a limit and is adjusted to the limit if it exceeded the limit. This controls maximum rate if change of the local clock frequency. The clock control register, in this case the PWM Filter register, is read and its value adjusted based on both algorithms.

EN998-042

Use both algorithms shown in Figure 9, causes the difference in frequencies between the encoder clock and local clock in the decoder to approach zero and the same value and the difference between the PCR time stamps and the STC to also approach zero.

Once the difference between the PCR and STC falls below a threshold for several PCR arrivals, the hardware clock recovery method can be used without the aid of the software algorithms. The switch to using only the hardware algorithm is made by the software algorithm by setting in the PCR-STC Threshold register to a value larger than the software threshold check in the previous step.

While the embodiments and exemplifications of our invention have been described and illustrated with respect to one particular standard, the MPEG-2 Standard, it is, of course to be understood the methods and apparatus of our invention can be used with other time division multiplexed and packet multiplexed data streams, having packetized headers and data, including, by way of example, the European Telecommunications Standards Institute (ETSI) Digital Video Broadcasting (DVB) standard, the High Definition Television (HDTV) standard and the Direct Satellite System (DDS) standard, among others.

While the invention has been described with respect to certain preferred embodiments and exemplifications, it is not intended to limited to scope the invention thereby, but solely by the claims appended hereto.

CLAIMS

Having thus described our invention, what we claim as new, and desire to secure by Letters Patent is:

1. A method for determining the difference between the local and program clock frequencies, then adjusting the frequency at which the local clock oscillates so that said difference approaches zero.

2. A method according to Claim 1 for adjusting a local clock of a digital data decoder, wherein the clock oscillates at a local clock frequency, the method further comprising the steps of:

maintaining a local clock value based on the oscillations of the local clock;

receiving clock time stamps at the decoder which specify the program clock value and frequency;

maintaining a program clock value based on the clock signals received at the decoder;

determining if there is any difference between the local clock and the program clock frequencies;

determining if there is an absolute difference between the local clock value and the program clock value;

if there is either a difference between the local clock and the program clock frequencies or an absolute difference between the local clock value and

the program clock value, then adjusting the frequency at which the local clock oscillates so that said difference approaches zero.

3. A method according to Claim 2, wherein the decoder includes hardware for adjusting the local clock frequency and a processor having a software program for adjusting the local clock frequency, and wherein the step of adjusting the frequency of the local clock includes the steps of:

using the hardware to adjust the local clock frequency until a threshold condition occurs; and

after the threshold condition occurs, using the processor to adjust the local clock frequency.

4. A method according to Claim 3, wherein the threshold condition is a function of the difference between the local clock value and the program clock value.

5. A method according to Claim 3, wherein the step of using the processor to adjust the local clock frequency includes the steps of:

monitoring for the occurrence of the threshold condition; and

transmitting a signal to the processor when the threshold condition occurs.

6. A system for adjusting a local clock on a digital data decoder, wherein the clock oscillates at a local clock frequency, the system comprising:

means for maintaining a local clock value based on the oscillations of the local clock;

means for receiving clock signals transmitted to the decoder at a program clock frequency;

means for maintaining a program clock value based on the clock signals transmitted to the decoder;

means for determining if there is any difference between the local clock and the program clock frequencies;

means for determining if there is an absolute difference between the local clock value and the program clock value; and

means for adjusting the frequency at which the local clock oscillates, when there is a difference between the local clock and the program clock frequencies or an absolute difference between the local clock value and the program clock value, so that said difference approaches zero.

7. A system according to Claim 6, wherein the means for adjusting the frequency at which the local clock oscillates includes:

hardware for adjusting the local clock frequency until a threshold condition occurs; and

a processor having a software program for adjusting the local clock frequency after the threshold condition occurs.

8. A system according to Claim 6, wherein the threshold condition is a function of the difference between the local clock value and the program clock value.

9. A system according to Claim 7, wherein the processor is not used to adjust the local clock frequency until the threshold condition occurs.

10. A system according to Claim 7, said hardware includes:

means for monitoring for the occurrence of the threshold condition; and

means for transmitting a signal to the processor when the threshold condition occurs.

11. A method for adjusting a local clock on a digital data decoder, wherein the clock oscillates at a local clock frequency, the method comprising the steps of:

maintaining a local clock value based on the oscillations of the local clock;

receiving clock signals at the decoder at a program clock frequency;

maintaining a program clock value based on the clock signals received at the decoder;

using the previous clock values to calculate the exact difference in frequency; and

adjusting the frequency at which the local clock oscillates so that said difference approaches zero.

12. A method according to Claim 11, wherein the using step includes the step of using both the difference in the clock frequency and the difference between the local clock value and the program clock value to calculate the exact difference in frequency.

BEST AVAILABLE COPY

DIGITAL AUDIO/VIDEO CLOCK RECOVERY ALGORITHM

ABSTRACT OF THE DISCLOSURE

A method of decoding a bit stream having an embedded clock, where the clock reference data is recovered from the bit stream. The clock reference data is used to create an adjusting value control a local clock frequency. The adjustment calculated such that the local clock frequency and the local clock value match the frequency and values in the clock reference data. The adjustment value is input to pulse generator to form a pulse train, which is used to generate the input to an adjustable oscillator.

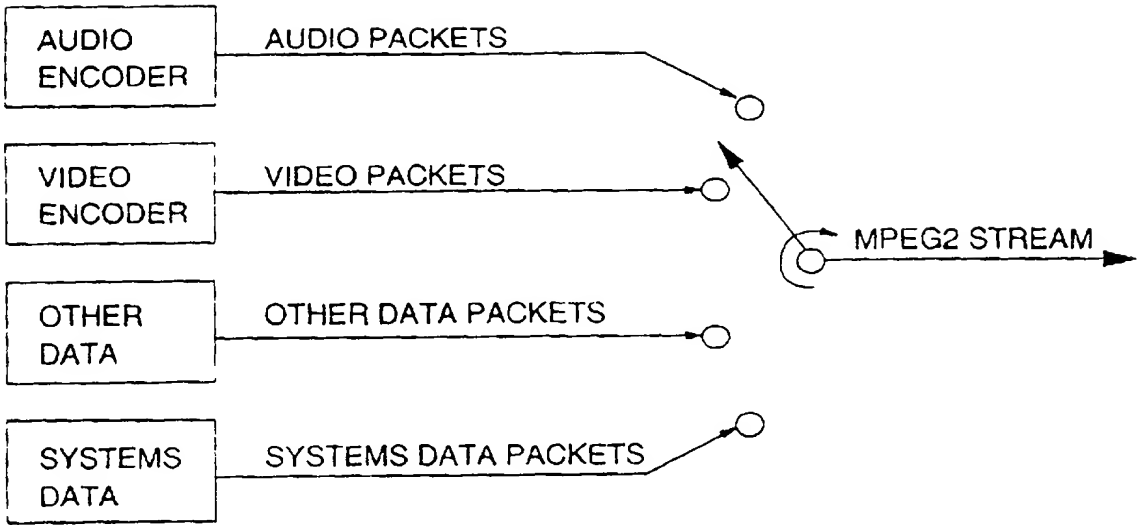
AUDIO ENCODER
AUDIO PACKETS
VIDEO ENCODER
VIDEO PACKETS
MPEG2 STREAM
OTHER DATA
OTHER DATA PACKETS
SYSTEMS DATA
SYSTEMS DATA PACKETS

FIG. 1

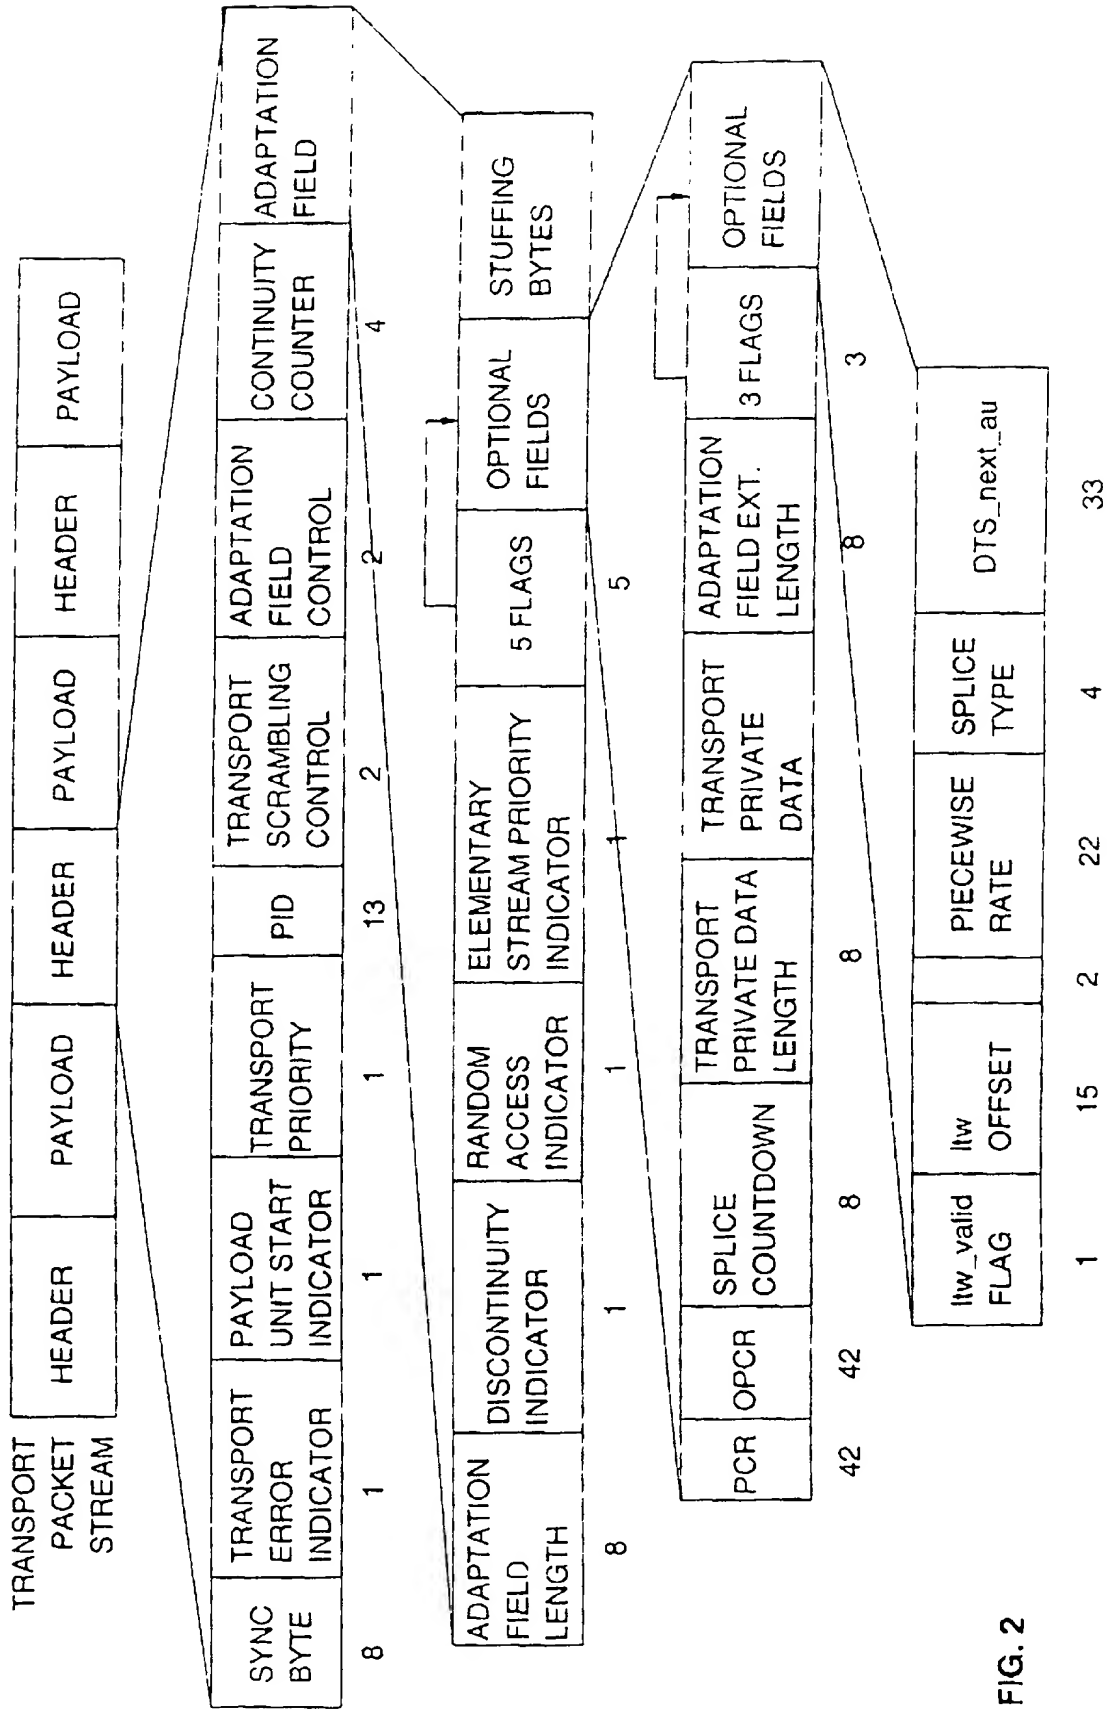
TRANSPORT PACKET STREAM
188 BYTES
HEADER
PAYLOAD
HEADER
PAYLOAD
HEADER
PAYLOAD
SYNC BYTE
TRANSPORT ERROR INDICATOR
PAYLOAD UNIT START INDICATOR
TRANSPORT PRIORITY
PID
TRANSPORT SCRAMBLING CONTROL
ADAPTATION FIELD CONTROL
CONTINUITY COUNTER
ADAPTATION FIELD
8
1
1
1
13
2
2
4
ADAPTATION FIELD LENGTH
DISCONTINUITY INDICATOR
RANDOM ACCESS INDICATOR
ELEMENTARY STREAM PRIORITY INDICATOR
5 FLAGS
OPTIONAL FIELDS
STUFFING BYTES
8
1
1
1
5
PCR
OPCR
SPLICE COUNTDOWN
TRANSPORT PRIVATE DATA LENGTH
TRANSPORT PRIVATE DATA
ADAPTATION FIELD EXT. LENGTH
3 FLAGS
OPTIONAL FIELDS
42
42
8
8
8
3
ltw_valid FLAG
ltw OFFSET
PIECEWISE RATE
SPLICE TYPE
DTS_next_au
1
15
2
22
4
33

FIG. 2

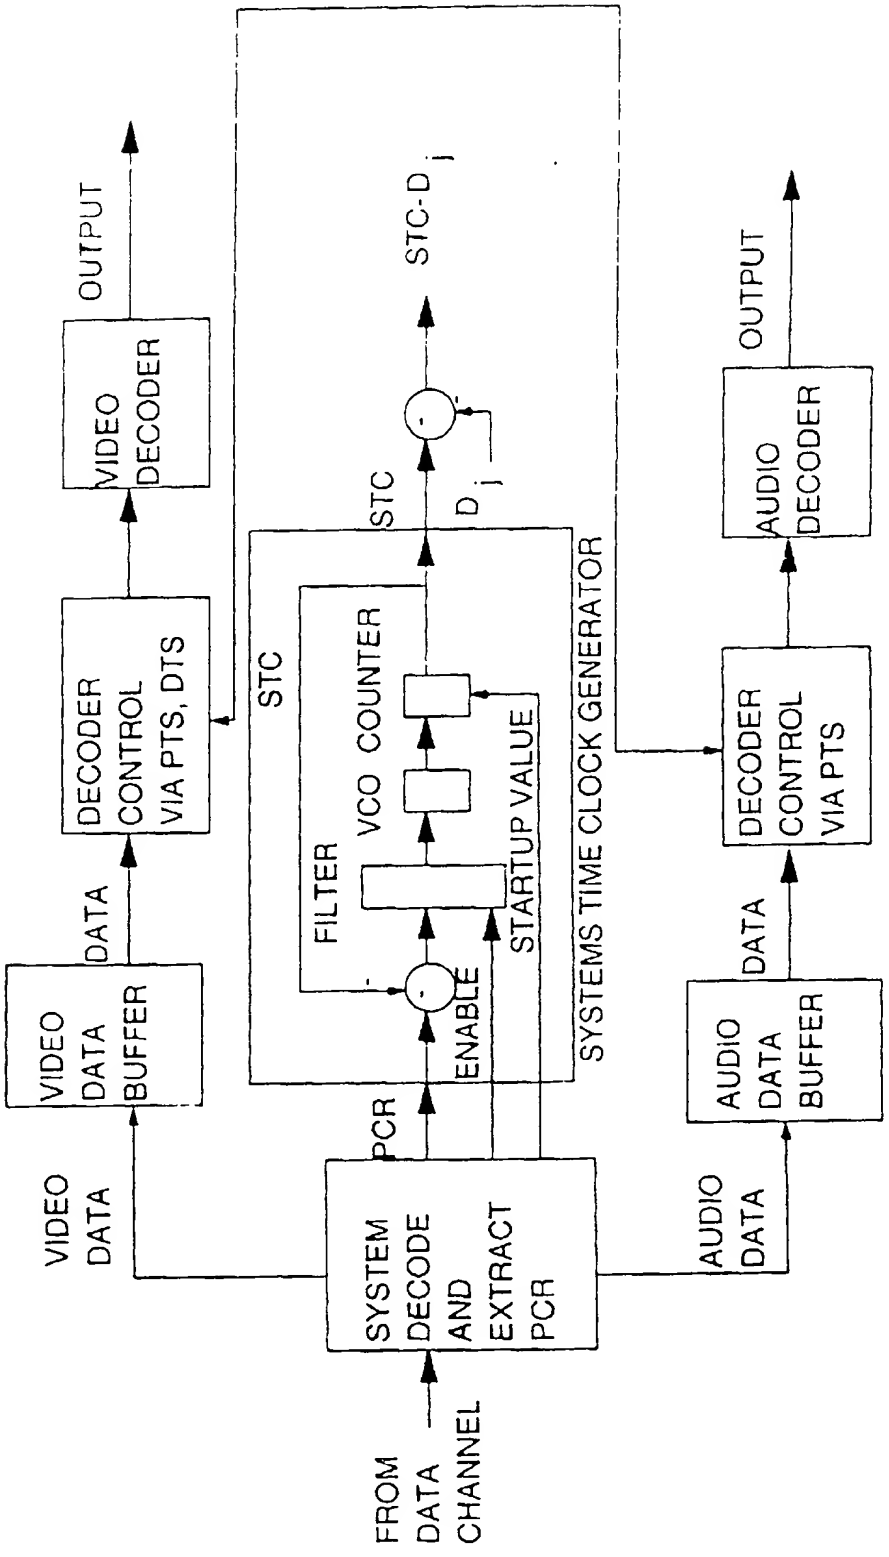
FROM DATA CHANNEL
SYSTEM DECODE AND EXTRACT PCR
VIDEO DATA
AUDIO DATA
PCR
VIDEO DATA BUFFER
AUDIO DATA BUFFER
DATA
DATA
DECODER CONTROL VIA PTS, DTS
DECODER CONTROL VIA PTS
VIDEO DECODER
AUDIO DECODER
OUTPUT
OUTPUT
SYSTEMS TIME CLOCK GENERATOR
STC
STC
FILTER
VCO COUNTER
ENABLE
STARTUP VALUE
STC-D j
D j
-
-

FIG. 3

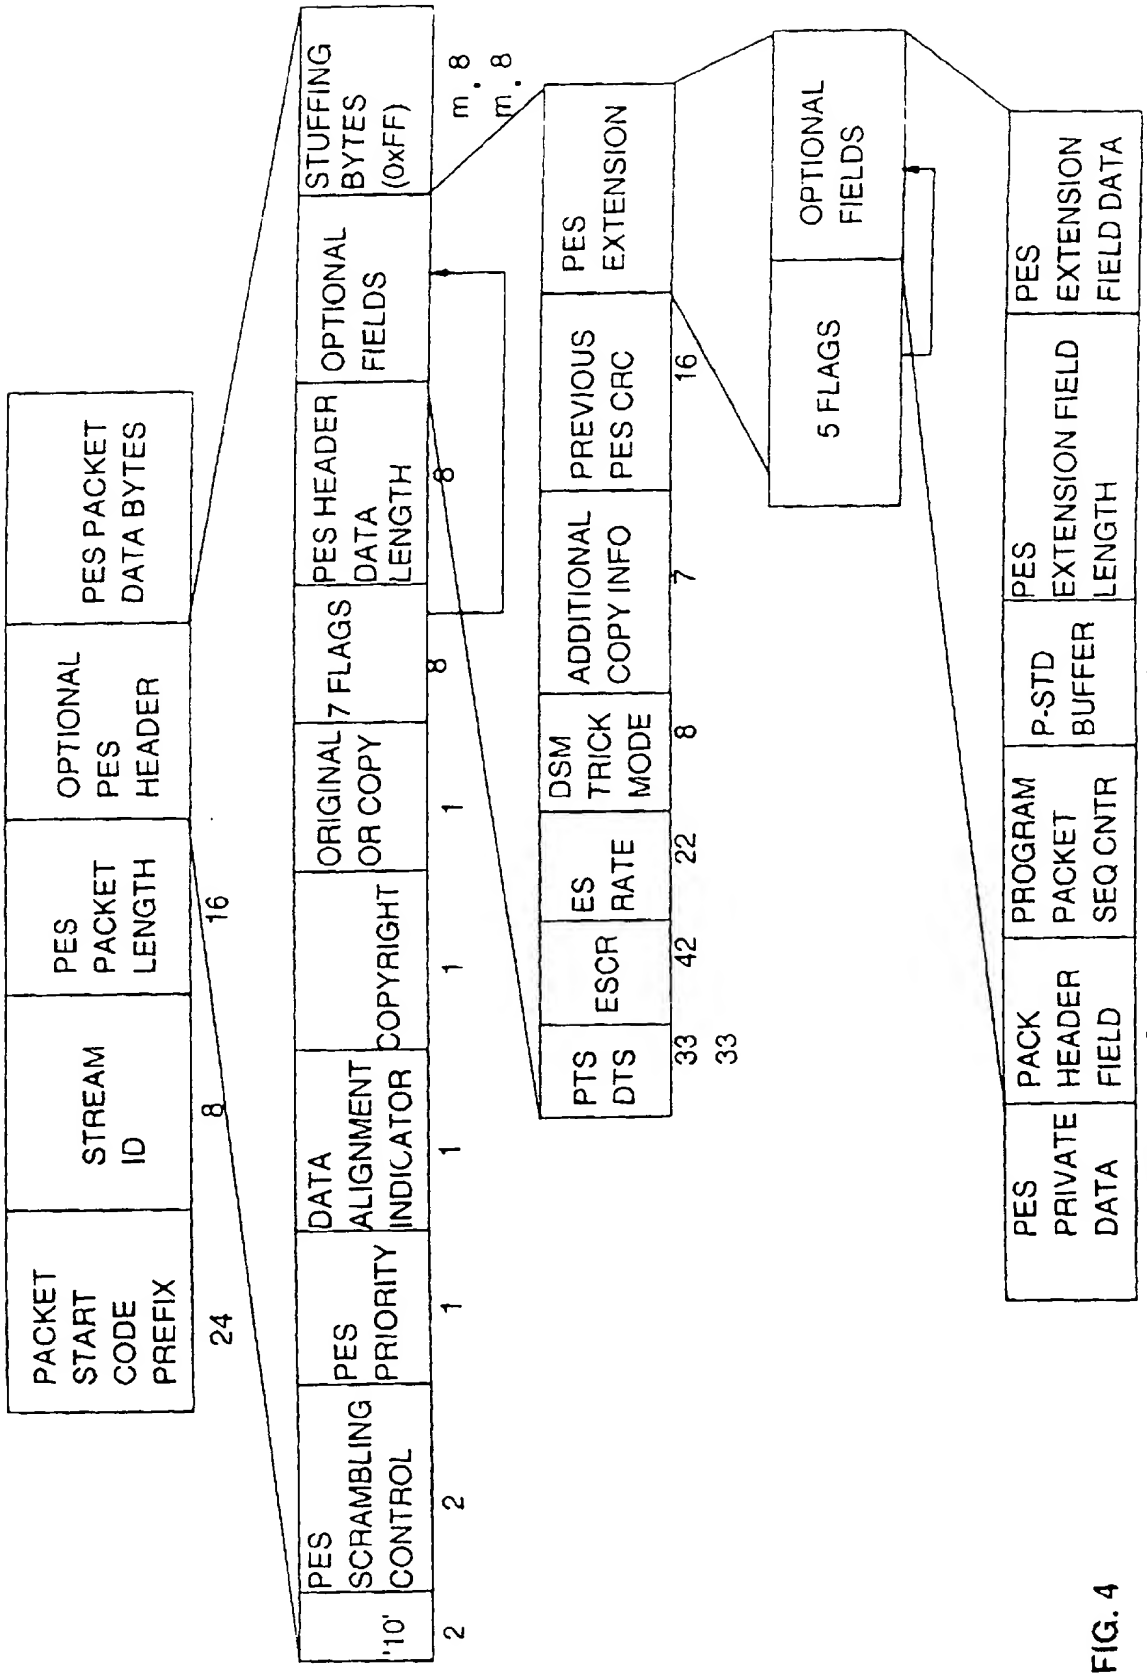
PACKET START CODE PREFIX
24
STREAM ID
8
PES PACKET LENGTH
16
OPTIONAL PES HEADER
PES PACKET DATA BYTES
'10'
2
PES SCRAMBLING CONTROL
2
PES PRIORITY
1
DATA ALIGNMENT INDICATOR
1
COPYRIGHT
1
ORIGINAL OR COPY
1
7 FLAGS
8
PES HEADER DATA LENGTH
8
OPTIONAL FIELDS
STUFFING BYTES (0xFF)
m . 8
m . 8
PTS DTS
33
ESCR
42
ES RATE
22
DSM TRICK MODE
8
ADDITIONAL COPY INFO
7
PREVIOUS PES CRC
16
PES EXTENSION
5 FLAGS
OPTIONAL FIELDS
PES PRIVATE DATA
128
PACK HEADER FIELD
8
PROGRAM PACKET SEQ CNTR
8
P-STD BUFFER
16
PES EXTENSION LENGTH
7
PES EXTENSION FIELD DATA

FIG. 4

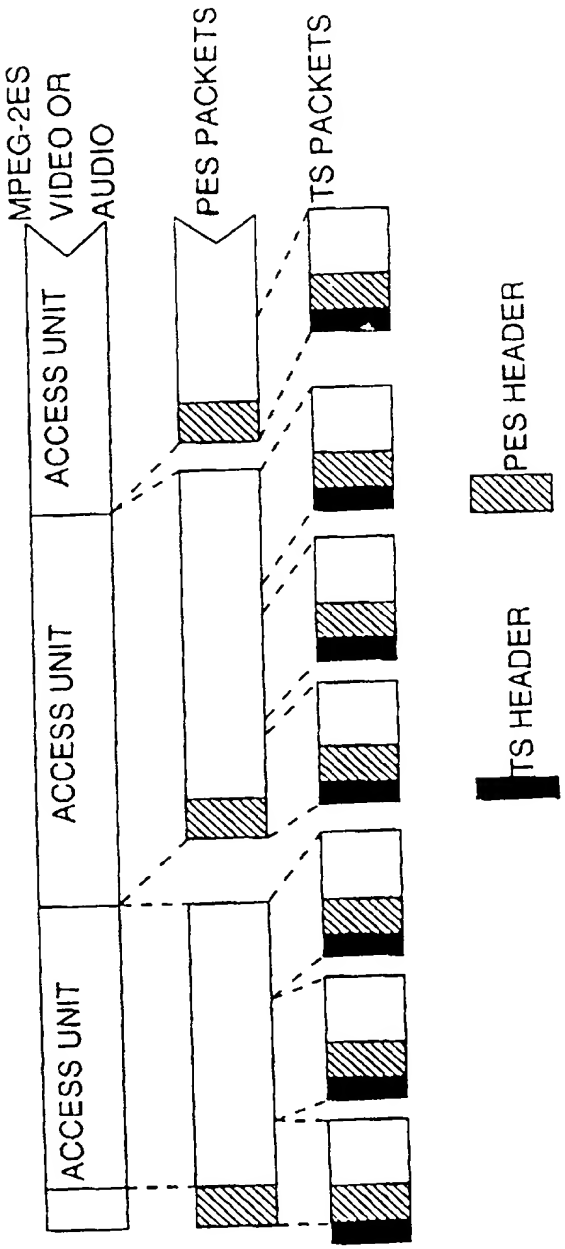

PRIOR ART
FIG. 5

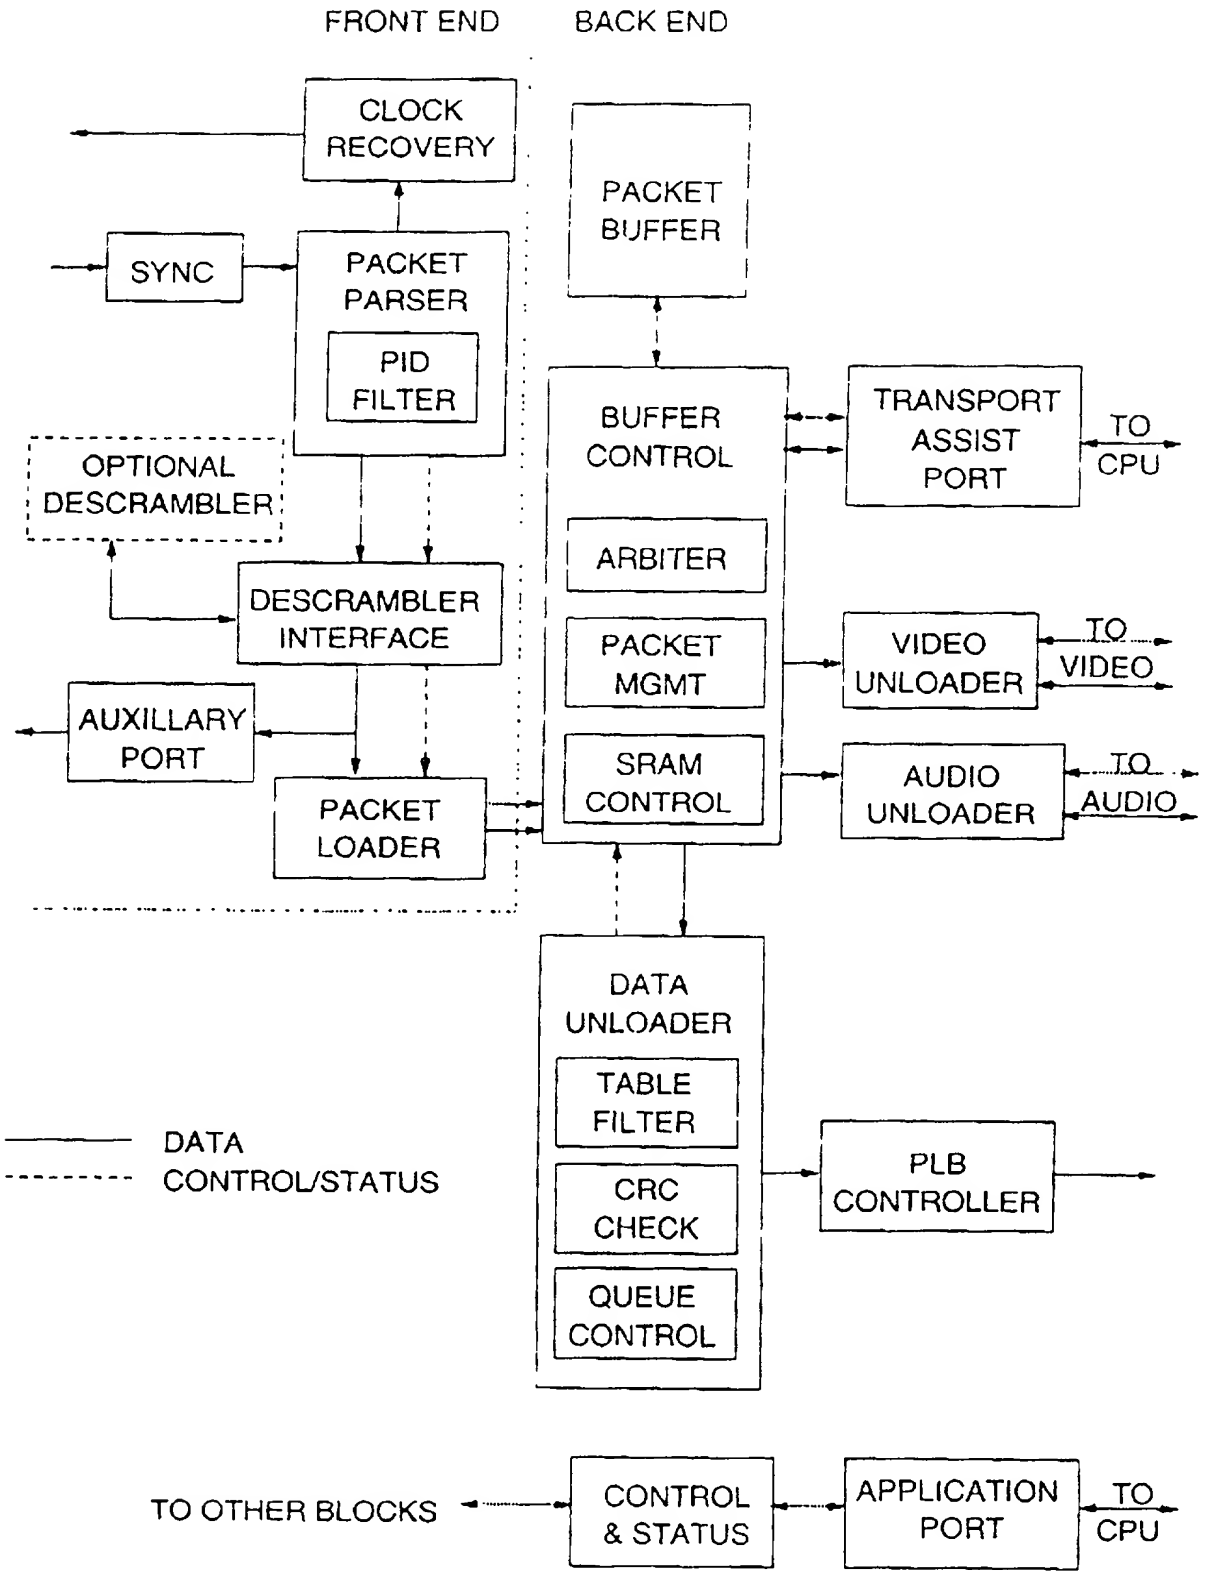
FRONT END
BACK END
CLOCK RECOVERY
PACKET BUFFER
SYNC
PACKET PARSER
PID FILTER
OPTIONAL DESCRAMBLER
BUFFER CONTROL
TRANSPORT ASSIST PORT
TO CPU
ARBITER
DESCRAMBLER INTERFACE
PACKET MGMT
VIDEO UNLOADER
TO VIDEO
AUXILLARY PORT
SRAM CONTROL
AUDIO UNLOADER
TO AUDIO
PACKET LOADER
DATA UNLOADER
TABLE FILTER
CRC CHECK
QUEUE CONTROL
PLB CONTROLLER
DATA
CONTROL/STATUS
TO OTHER BLOCKS
CONTROL & STATUS
APPLICATION PORT
TO CPU

FIG. 6

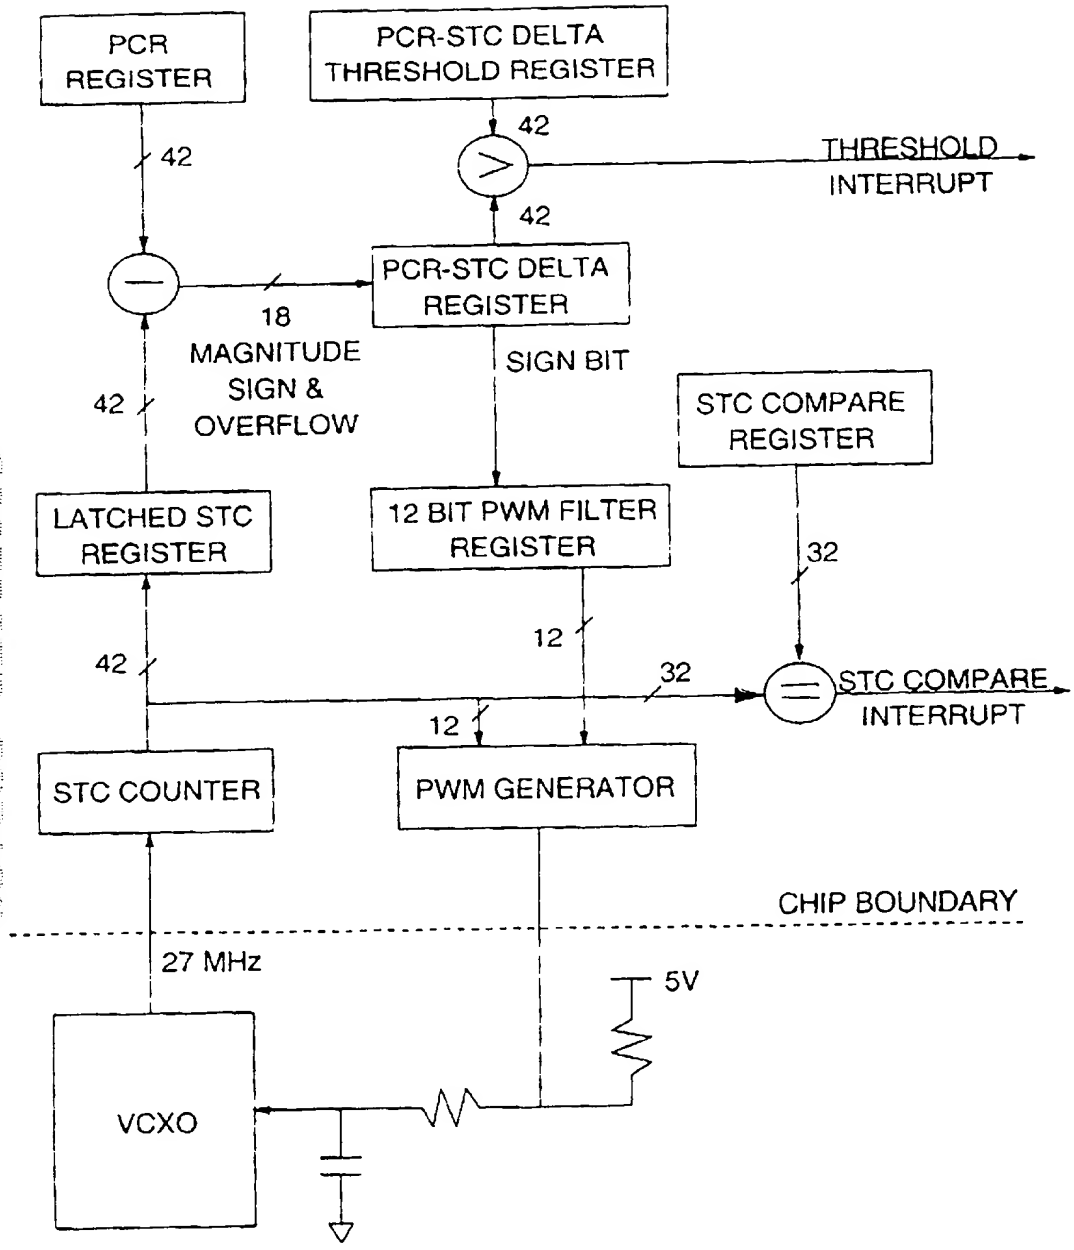
PCR REGISTER
PCR-STC DELTA THRESHOLD REGISTER
42
42
THRESHOLD INTERRUPT
42
PCR-STC DELTA REGISTER
18
MAGNITUDE SIGN & OVERFLOW
SIGN BIT
42
STC COMPARE REGISTER
LATCHED STC REGISTER
12 BIT PWM FILTER REGISTER
32
12
42
32
STC COMPARE INTERRUPT
12
STC COUNTER
PWM GENERATOR
CHIP BOUNDARY
27 MHz
5V
VCXO

FIG. 7

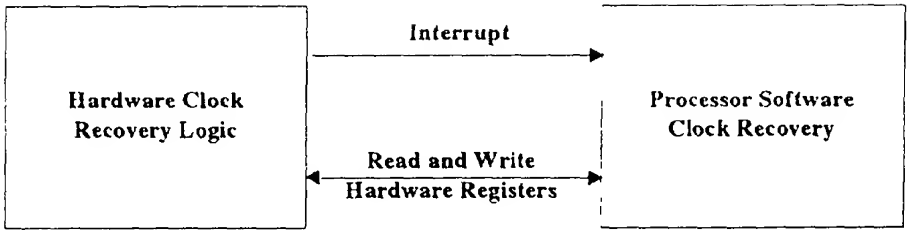
Hardware Clock
Recovery Logic
Interrupt
Read and Write
Hardware Registers
Processor Software
Clock Recovery

FIGURE 7

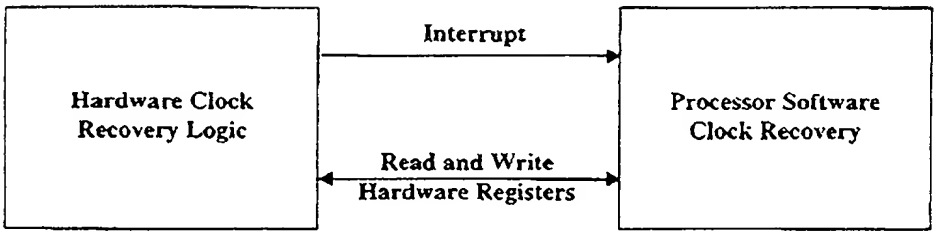

Figure 8

EXPRESS MAIL NO. EV339926060

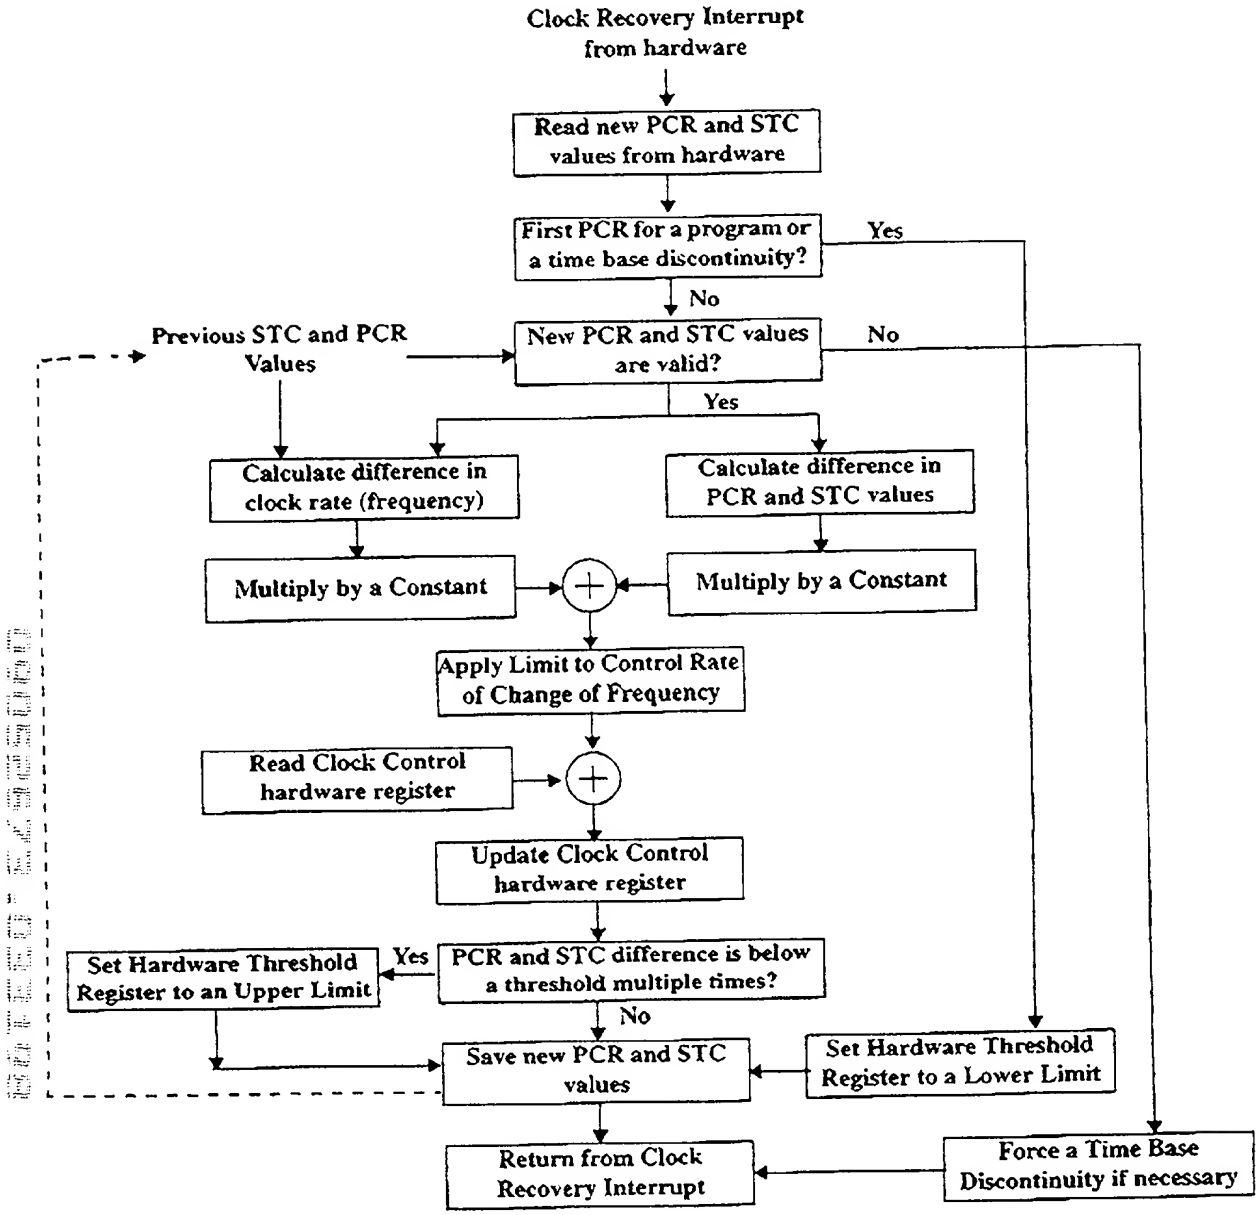
Clock Recovery Interrupt from hardware
Read new PCR and STC values from hardware
First PCR for a program or a time base discontinuity?
Yes
No
Previous STC and PCR Values
New PCR and STC values are valid?
No
Yes
Calculate difference in clock rate (frequency)
Calculate difference in PCR and STC values
Multiply by a Constant
Multiply by a Constant
Apply Limit to Control Rate of Change of Frequency
Read Clock Control hardware register
Update Clock Control hardware register
Set Hardware Threshold Register to an Upper Limit
Yes
PCR and STC difference is below a threshold multiple times?
No
Save new PCR and STC values
Set Hardware Threshold Register to a Lower Limit
Return from Clock Recovery Interrupt
Force a Time Base Discontinuity if necessary

Figure 9